


**GENERAL®**



# JUMBO DISPLAY DIGITAL TIMER

**USER'S MANUAL  
T1899B**

*Please read this manual carefully and thoroughly before using this product.*

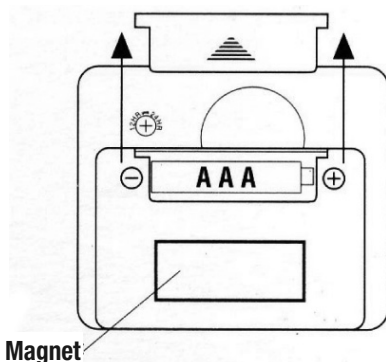

---

## SETUP INSTRUCTIONS

1. Remove the plastic film from the display.
2. In the back of the unit, open the battery compartment by sliding its cover up and off in the direction of the arrow (see figure).
3. Insert the supplied "AAA" battery in the direction indicated. The beeper will sound quickly four times. The display will show a running clock beginning at **AM 12:00:00**.
4. Replace the battery compartment cover.

---

## TO SET THE CLOCK

1. Press and hold the **CLOCK** button. A black cursor will blink in the bottom left corner of the display.
2. Press the sequence of number keys corresponding to the present time, adding an initial **0** for single-digit hour numbers. For example: To set the clock to 4:15 (AM or PM), press **0 4 1 5**. To set the clock to 11:30, press **1 1 3 0**. If you make a mistake entering digits, press the **CLEAR** button. This resets the procedure to the first step.
3. Toggle between **AM** and **PM** (shown at the left of the time) by pressing the **START/STOP** button (stenciled **AM ≈ PM** in black).
4. When the hours and minutes digits (and AM or PM setting) of the time are correct as shown, add the seconds digits by pressing any two number buttons (or **0 0** at the top of the minute for a precise setting). This saves the clock setting.
5. To view the clock display in 24-hour (military) format, press the small gray button on the upper back of the unit stenciled **12 HR ≈ 24 HR** in black.

---

## TO USE THE STOPWATCH (COUNT-UP TIMER)

1. Press the **COUNT-UP** button. The beeper will sound, **COUNT UP** will appear in the upper right corner, and the display will read **0:00:00**.
2. Press the **START/STOP** button to start counting up from 0:00:00. The beeper will sound. Press the button again to pause the counter, sounding the beeper again. Press the **START/STOP** button again to resume counting up.
3. To reset the counter to **0:00:00**, pause the counter and press the **CLEAR** button.
4. The count-up timer “rolls over” to **0:00:00** one second past 9:59:59.

---

## TO USE THE COUNTDOWN TIMER

1. Press the **TIMER** button. The beeper will sound, **TIMER** will appear in the upper right corner, and the display will read **0:00:00**.
2. Press, in order, the five number keys corresponding to the desired countdown duration. For example: To enter a duration of 3 hours, 48 minutes and 30 seconds, press **3 4 8 3 0**. You can enter any duration—including numbers larger than 60 for minutes or seconds—but you must enter exactly five digits. This feature can come in handy. For example, you can enter a duration of 90 minutes simply by keying in **0 9 0 0 0**.
3. Press the **START/STOP** button to begin the countdown. The beeper will sound. Press the button again to pause the countdown, sounding the beeper again. Press the **START/STOP** button again to resume the countdown.
4. The alarm will sound when the countdown reaches 0:00:00. To cancel the alarm, press the **START/STOP** button. The display will reset to the last duration entered. To count down from this value again, press the **START/STOP** button again.
5. To reset the countdown counter to **0:00:00**, pause the countdown and press the **CLEAR** button.

---

## OPERATING NOTE

- In clock mode, the terms **COUNT UP** or **TIMER** will appear in the upper right corner of the display to remind you that either the Count-Up timer (Stopwatch) or Count-Down timer is working. If both are working, both terms will appear.



## Specialty Tools & Instruments

---

### GENERAL TOOLS & INSTRUMENTS

80 White Street New York, NY 10013-3567

PHONE (212) 431-6100 FAX (212) 431-6499

TOLL FREE (800) 697-8665

e-mail: sales@generaltools.com

www.generaltools.com

TI899B User's Manual

Specifications subject to change without notice

©2011 GENERAL TOOLS & INSTRUMENTS

NOTICE - WE ARE NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS.

MAN#TI899B 10/27/11